


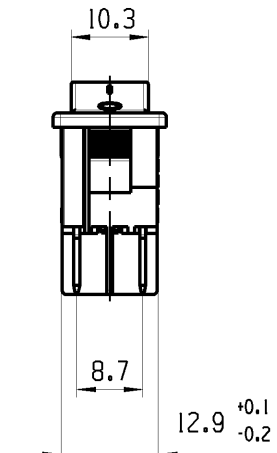


1	2	3	4
recommended cut-out for snap-in fixing (ledge opposite to snap-in direction)	wall thickness	length of cut-out	width of cut-out
	0.75 to 1.25 1.25 to 2 2 to 3	19.2 ^{+0.1} 19.4 ^{+0.1} 19.8 ^{+0.1}	12.9 ^{+0.1} 12.9 ^{+0.1} 12.9 ^{+0.1}

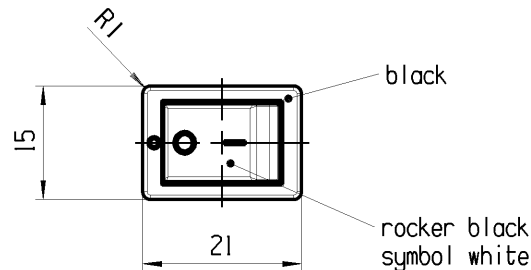

Marking

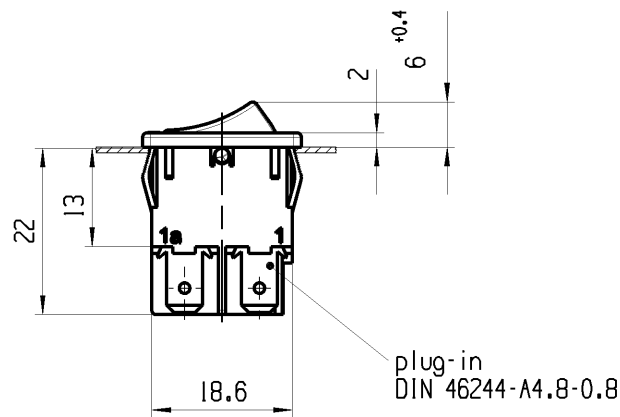

1858.
10(10)A 250Vac 5E4
16(10)A 250Vac IE4



15 T100/55 cULus


code of manufacture:
place/year/week

on box: G
0041.1761

DPST

suitable for appliances of class II
protected acc. to DIN 40 050 IP40

G : matching nach IEC 60335-1:2001 clause 30

General tolerances							Sheet 01			Ident.	Document number	Index	
All dimensions are in millimetres	Shape and location ⊙ ≡	Angle ± 2 °	Edge tolerance 		Length	Rad i	Format DIN	Projection 	Scale 1 : 1	K	18581103	i	
				0-6	± 0.2	± 0.2							
				>6-15	± 0.4	± 0.3							
				>15-30	± 0.4	± 0.5							
				>30-70	±	± 10%							
				>70-120	±								
>120	±												
i	111886	2017-11-14		MUT			System NX V10.0			appliance switch			
h	103593	2016-09-14		MUT									
g	47886	2006-06-23		MUT			Replacement of Zg.gl.Nr.v.01.07.1994						
f	41634	2004-12-03		BRC									
Index	ECN-No.	Date (YYYY-MM-DD)		Edited by									